



- LIBERO CH**
- > Multi-Use PDF Logger
 - > Temperature and humidity
 - > USB and Bluetooth® Interface




TECHNICAL SPECIFICATIONS

LIBERO CH

Multi-Level and Multi-Use PDF Logger with USB and Bluetooth® Interface with Internal Temperature and Relative Humidity Sensor

LIBERO CH is a highly versatile multi-use PDF-logger for shipment monitoring as well as monitoring of site and storage conditions. The internal combined temperature and relative humidity sensor comes with a 100% sensor calibration¹. Supporting up to eight temperature alarm zones, 2 humidity thresholds, MKT and duration as alarm criteria – LIBERO CH allows you to create temperature/humidity profiles for individual products. In addition, you have the option to switch the alarming function off and on again if alarming criteria is required. This can be useful in cases where for example a transportation box or storage container has to be cleaned.

LIBERO CH can store up to 75'500 measurement values, 37'750 values each for temperature and humidity, and has a battery lifetime of up to 3 years (depending on usage of Bluetooth® interface). It can be ordered with an optional stainless steel bracket for easy mounting on your equipment. Release products with confidence based on the OK or ALARM status on the display and download the PDF report via the convenient USB interface without any additional software being required. Or use the logger's Bluetooth® interface to download the PDF to your smart device via LIBERO Cx BLE app available for iOS and Android, which you can also use to start or stop the logger without having to remove it from your equipment or consignment.

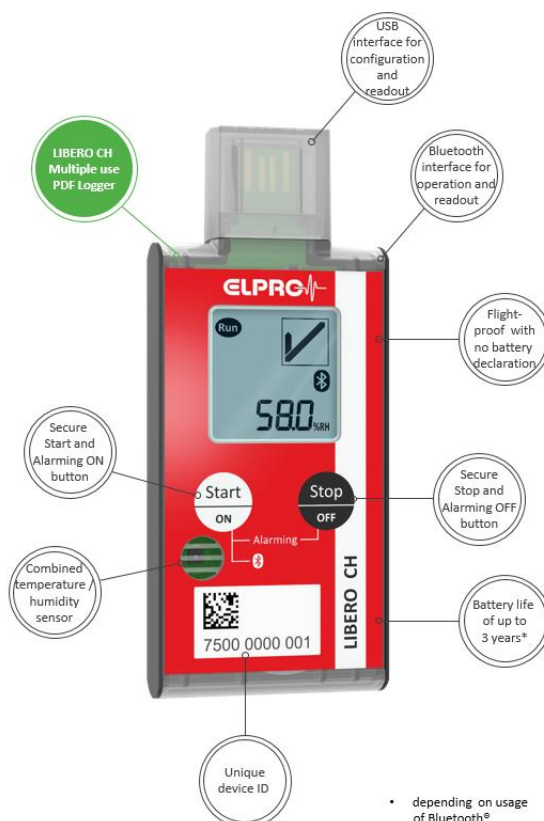

we prove it.

¹ depending on usage of Bluetooth®

SWISS QUALITY



- > Monitors your valuable goods during transport or storage
- > 100% calibrated temperature and humidity sensor¹
- > Simple and safe in use
- > Compatible with ELPRO's liberoMANAGER cold chain database
- > Alarming on and alarming off

Technical Specifications LIBERO CH

Type	PDF Logger with USB and Bluetooth® Low Energy (BLE) interface with internal temperature/humidity probe	
Application area	Site Monitoring, Container Monitoring, Round Trip Monitoring, Storage	
Recording options and mode	Multiple use: start/stop or loop mode	
Type of probe	Combined internal T/RH probe	
Measurement range	-30 °C..+70 °C, 0 %RH..100 %RH	
Measurement accuracy	Temperature: ±0.4 °C for -30.0 °C..+70.0 °C	Relative humidity: ±2.5 %RH for 0.0 %RH..90.0 %RH ±3.5 %RH for 90.1 %RH..100.0 %RH
Measurement resolution	0.1 °C, 0.1 %RH	
Measurement interval	1 to 60 minutes, user configurable	
Measurement capacity	37'750 values each for temperature and humidity (equals logging duration of 12 months at 15 minute logging interval)	
Battery life	14 months to 3 years (depending on usage of Bluetooth® interface and ambient temperature below 0 °C)	
Battery type	Button cell contained in equipment UN3091, exempt from DGR declaration; non-replaceable battery	
Configurable alarms	8 temperature alarm zones with single or cumulative delays, 2 humidity thresholds, with alarm delay, MKT alarm	
Start-up delay	User configurable based on time or temperature	
Display	Multifunction LCD, size: 22 × 22 mm (0.87 x 0.87 inch), with OK and Alarm indicator	
Certificate	Validation and calibration certificate available via compliance.elpro.com , optionally according to ISO 17025 ¹	
Traceability	Unique ID number (traceable to component level)	
Report	Built-in PDF file generator automatically establishes an evaluation report with embedded data upon connection to a USB port or when triggered in the LIBERO Cx BLE app connected via Bluetooth®. Complies with the ISO standard 19005-1 Document Management for the long-term preservation of electronic documents (PDF/A) and FDA 21 CFR Part 11. - Customizable report title and filename - Text area for additional information (e.g. shipment information, instructions for recipient, etc.) - Statistics (min/max, average, alarm, alarming on/off) and detailed logger information (ID, configuration, etc.) - Chart visualizing the temperature curve and alarm limits	
Case dimension weight IP code	ABS/PC plastic material 95 × 41 × 11 mm (3.74 x 1.61 x 0.43 inch) 39 g (0.1 lb) IP54	
Certifications conformity	CE FCC ICES RoHS Safe Transport of Chemical Goods WEEE	
Standards and Guidelines	GAMP5 RTCA DO-160 EN12830	
App for Smart Device	iOS and Android	
Wireless connection to the App	Bluetooth® Low Energy (BLE)	
Data logger configuration and additional analysis software	liberoCONFIG software to create, store and manage individual settings in a logger profile as well as SmartStart, a liberoCONFIG component allowing a safe and quick application of profiles and additional information to PDF Logger. elproVIEWER software to access and export embedded data of PDF report, for data analysis and comprehensive report features. Both software products can be downloaded at elpro.com/software-downloads . Fully compatible with liberoMANAGER database.	

¹ Available Q2/2021; until then only a validation certificate will be issued by default; customer-specific calibration (optionally according to ISO 17025) is available at extra costs.