




TECHNICAL SPECIFICATIONS

ECOLOG-PRO 1TGi

Wireless IoT data logger with internal temperature probe for elproCLOUD

ECOLOG-PRO 1TGi is an easy and versatile solution to monitor your valuable goods stored in refrigerators, freezers or ambient conditions. Battery-operated and wireless, cellular network ensure plug and play – set-up is easy and only takes a few minutes. Simply register the sensor on your elproCLOUD account and place it in your room or equipment. A reliable internal storage capacity for thousands of measurements ensures all your valuable data are sent to elproCLOUD. The elproCLOUD web application aggregates all your sensor data to provide a convenient, comprehensive overview, sending out alerts if alarm limits are breached. Optionally, a robust, lockable bracket is available.

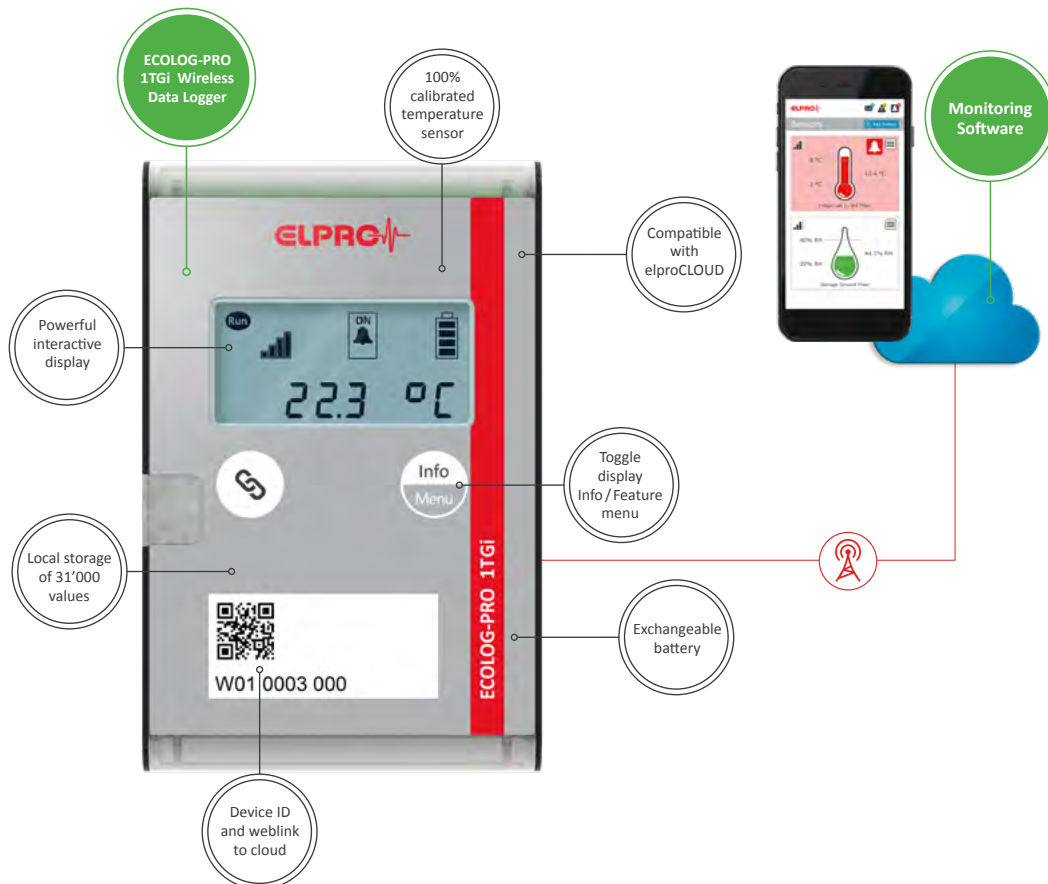

we prove it.

SWISS QUALITY



- > Monitors your valuable goods in rooms, refrigerators or freezers
- > Highly accurate and 100% calibrated temperature sensor
- > Simple and safe in use and application
- > Flexible positioning thanks to cellular communication
- > Compatible with elproCLOUD

Technical Specifications ECOLOG-PRO 1TGi

Type	Wireless IoT data logger with internal temperature probe
Application area	Temperature monitoring for rooms, refrigerators, freezers
Sensors	Temperature sensor Light sensor
Measurement range	Measurement range of internal sensor: -30 °C..+70 °C
Application range	0 °C..+55 °C for Alkaline battery / -40 °C..+55 °C for LiFe battery (only short term use above and below application range allowed)
Measurement accuracy	Internal Sensor ±1.0 °C for -30.0 °C..-20.1 °C ±0.5 °C for -20.0 °C..-0.1 °C ±0.4 °C for 0.0 °C..+65.0 °C ±0.5 °C for +65.1 °C..+70 °C
Measurement Resolution	0.1 °C
Measurement interval	5, 10, 15, 20, 30, 60 minutes; user programmable via software (elproCLOUD)
Cellular network	LTE-M and NB-IoT (Global Roaming)
Communication interval	30 min to 6 hours, user programmable, event-driven immediate communication (e.g. temperature excursion)
Measurement capacity	31'000 measurement values
Battery life	Started data logger runs up to 14 months, batteries are exchangeable. Use below 0 °C and above +40 °C over a longer period of time and/or intensified communication behavior (e.g. bad connection) can shorten battery life
Battery type	2 × Alkaline AA (for refrigerators or ambient) or 2 × LiFe AA (for freezer applications)
Display	Multifunction LCD, size: 42 × 20 mm
Certificate	Manufacturer validation certificate per delivery, production validation and 3-point calibration certificate (ILAC/NIST/ISO 17025 traceable) per ID number via compliance.elpro.com, additional customer-specific calibration points optionally available.
Traceability	Unique ID number (traceable to component level) + IMEI (International Mobile Equipment Identity)
Reporting	Via software (elproCLOUD)
Case dimension weight	ABS plastic material 100 × 65 × 19 mm (3.9 x 2.5 x 0.7 in) 125 g (4.4 oz)
Certifications Conformity	CE FCC UKCA ICES RoHS UN38.3 WEEE NCC RSM TDRA ENACOM IMDA MIC ACMA/RCM
Standards	EN 12830 RTCA DO-160 (EMC) GAMP5